


STANDARD

ARNU05GSBL4 / ARNU07GSBL4 / ARNU09GSBL4
ARNU12GSBL4 / ARNU15GSBL4 / ARNU18GSCL4 / ARNU24GSCL4

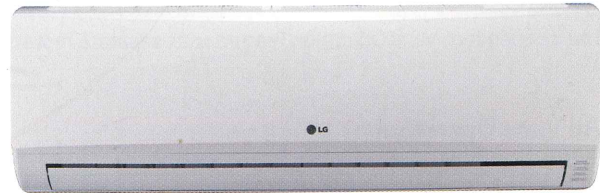

INDOOR UNIT
WALL MOUNTED UNIT

Model	Independent Unit		ARNU05GSBL4	ARNU07GSBL4	ARNU09GSBL4	ARNU12GSBL4	ARNU15GSBL4	ARNU18GSCL4	ARNU24GSCL4
Capacity	Cooling	Nom kW	1.6	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	Nom kW	1.8	2.5	3.2	4.0	5.0	6.3	8.0
Power Input	Cooling	Nom W	21.0	21.0	21.0	21.0	21.0	39.5	39.5
	Heating	Nom W	21.0	21.0	21.0	21.0	21.0	39.5	39.5
Power Supply	Φ/V/Hz		1 / 220 -240 / 50, 60	1 / 220 -240 / 50, 60	1 / 220 -240 / 50, 60	1 / 220 -240 / 50, 60	1 / 220 -240 / 50, 60	1 / 220 -240 / 50, 60	1 / 220 -240 / 50, 60
Airflow Rate	Cooling	H/M/L m ³ /min	6.5 / 6.0 / 5.5	7.0 / 6.5 / 5.5	8.2 / 7.0 / 5.5	9.5 / 8.2 / 6.5	10.5 / 9.0 / 7.0	12.5 / 12.0 / 11.3	14.0 / 12.7 / 11.5
	Heating	H/M/L m ³ /min	6.5 / 6.0 / 5.5	7.0 / 6.5 / 5.5	8.2 / 7.0 / 5.5	9.5 / 8.2 / 6.5	10.5 / 9.0 / 7.0	12.5 / 12.0 / 11.3	14.0 / 12.7 / 11.5
Sound Pressure	H/M/L	dB(A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	40 / 36 / 32	38 / 35 / 33	43 / 39 / 35
Sound Power	H/M/L	dB(A)	54 / 53 / 52	54 / 53 / 52	55 / 54 / 52	55 / 54 / 53	58 / 56 / 54	57 / 54 / 52	62 / 58 / 54
Dimensions	Body	WxHxD mm	895 × 289 × 215	895 × 289 × 215	895 × 289 × 215	895 × 289 × 215	895 × 289 × 215	1,030 × 325 × 255	1,030 × 325 × 255
Net Weight		kg	10	10	10	* 10	10	14	14
Piping Connection	Liquid	mm	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas	mm	12.7	12.7	12.7	12.7	12.7	12.7	15.9
	Drain	ID mm	16	16	16	16	16	16	16

* This product contains Fluorinated Greenhouse Gases,(R410A)

Note :

1. Capacities are based on the following conditions

Cooling - Indoor temp. 27°C(80.6°F)DB / 19°C(66.2°F)WB
Outdoor temp. 35°C(95°F)DB / 24°C(75.2°F)WB
Interconnecting piping length 7.5m
Level difference of zero

Heating - Indoor temp. 20°C(68°F)DB / 15°C(59°F)WB
Outdoor temp. 7°C(44.6°F)DB / 6°C(42.8°F)WB
Interconnecting piping length 7.5m
Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification

3. I.D - 'Internal Diameter'

Accessories

Model	ARNU05GSBL4	ARNU07GSBL4	ARNU09GSBL4	ARNU12GSBL4	ARNU15GSBL4	ARNU18GSCL4	ARNU24GSCL4
Dry Contact	Simple (1 Contact point with case)			PDRYCB000			
	2 Contact point			PDRYCB400			
	For Thermostat (On-off / Mode / Fan speed)			PDRYCB300			
	Modbus Communication			PDRYCB500			

Wired Remote Controller

Premium	Standard II		Simple	Simple for Hotel		Wired Remote Controller
PREMTA000 PREMTA000A PREMTA000B	PREMTB001 (White)	PREMTB001 (Black)	PQRCVCL0Q (Black) PQRCVCL0QW (White)	PQRCHCA0Q(Black) PQRCHCA0QW(White)		PQWRHQ0FDB